



## MARCH 2022 MONITORING DATA

### Notes on Monitoring Data

Environment Protection Licence: 11781

Date Published: 9<sup>th</sup> May 2022

Date Sampled: 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup>, 6<sup>th</sup>, 7<sup>th</sup>, 8<sup>th</sup>, 19<sup>th</sup>, 24<sup>th</sup> and 31<sup>st</sup> March.

Date Sample Results Released: 14<sup>th</sup> April 2022

In relation to the monitoring data, IPL notes:

- The automatic sampler only triggers when a specified volume of rainfall has occurred. Sampling is currently initiated when the following two conditions are met:
  - A minimum 2 mm rainfall depth is measured in the preceding 60-minute period by the tipping bucket rain gauge; and
  - Stormwater flow over is detected by the flow sensor installed inside the drainage line.
  - Provided these conditions continue to be met, stormwater is sampled from the monitoring pit every 15 minutes and stored in sample bottles housed in a carousel within the auto sampler unit.
- Prior to analysis of collected stormwater samples “composite stormwater samples” are produced. Composite sampling consists of a collection of numerous individual discrete samples collected in a common container over a sampling period. Composite samples are collected from the discharge point and sent for analysis. The current sampling period is ‘per rainfall event’. This is defined as a continuous period where the flow and rainfall conditions are continued to be met and the time between sample collection is 15 minutes.
- EPA Licence 11781 sets no specific pollutant limit on the site’s water discharges.
- IPL Newcastle has recently concluded the improvement works conducted within the Northern Drain network. These works included the diversion of clean roof water and the re-lining of all existing stormwater pipes. All stormwater flow is now diverted to the Central drain.

## MARCH 2022 MONITORING DATA

### Central Drain Storm Water Drainage Analysis (EPL 7)

Pollutant	Units of Measure	Monitoring Frequency Required	No of Samples Analysed in month	Min. Value	Mean Value	Median Value	Max. Value
pH	pH Unit	Monthly during discharge	17	6.33	6.67	6.65	7.07
Total Suspended Solids	mg/L	Monthly during discharge	17	2.50	23.24	17.00	108.00
Sulfur as S	mg/L	Monthly during discharge	17	10.0	84.71	40.0	360.0
Sulfate as SO <sub>4</sub>	mg/L	Monthly during discharge	17	14.0	86.65	40.0	422.0
Total Zinc	mg/L	Monthly during discharge	17	0.07	0.20	0.174	0.9
Ammonia as N	mg/L	Monthly during discharge	17	3.98	25.94	10.0	131.0
Nitrite as N	mg/L	Monthly during discharge	17	0.11	0.39	0.220	1.3
Nitrate as N	mg/L	Monthly during discharge	17	1.45	6.11	4.72	26.0
Nitrite and Nitrate as N	mg/L	Monthly during discharge	17	2.28	6.49	4.9	27.0
Total Kjeldahl Nitrogen as N	mg/L	Monthly during discharge	17	4.00	39.84	13.9	193.0
Total Nitrogen as N	mg/L	Monthly during discharge	17	6.70	46.37	18.8	204.0
Phosphorus (Total) as P	mg/L	Monthly during discharge	17	4.70	20.39	7.6	114.0
Phosphorus (Reactive) as P	mg/L	Monthly during discharge	17	4.09	19.54	6.2	115.0
Phosphate (Calculation from Total Phosphorus)	mg/L	Monthly during discharge	17	14.4	62.55	23.3	350.0

Not detected values defined as half the detection limit for the purpose of calculating the mean and median

### Rainfall & Flow Data


Each drain has a rain gauge and flow sensor. The rain gauge and flow sensor transmit the rain and flow information to a controller which then initiates the automatic sampler to take a sample in accordance with the site's EPL licence (EPL 11781).

Flow rate information is recorded on a continual basis via flow sensors located inside the discharge drain. A magnetic flow sensor has recently been installed to measure the flow at the Central drain.

**Figure 1** summarises the rainfall for March 2022: it is noted that the data is sourced from Nobby's BOM station.



### MARCH 2022 MONITORING DATA

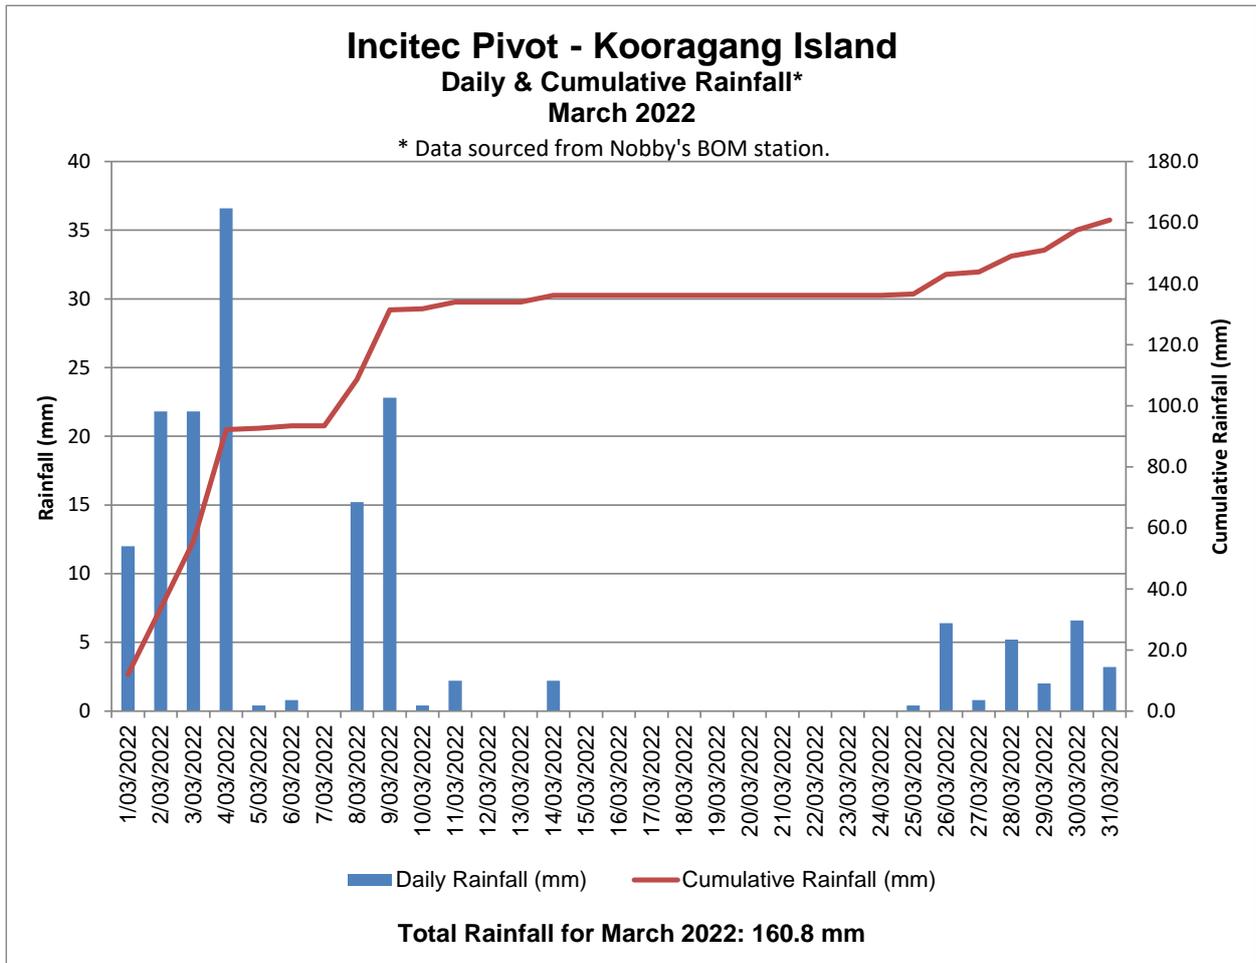

**Figure 1** *March 2022 Rainfall Summary*